



# DATA SOUND - LABORATORIES -


.....  
EMBEDDING THE FUTURE



**Electronic  
Design**



**Panel  
PC / HMI**



**Single Board  
Computer**



**Industrial  
PC**

## Why choose DSL?

- Over 25 Years Industry Experience
- 5 Years Warranty on all Products
- Evaluation Products Available
- Lifetime Technical Support

## Our Services

- Electronic Design
- Production Management
- Assembly and Test
- Bespoke BIOS Creation
- Industrial Embedded PC Solutions



Call us on +44(0)1462 675530



Email us at [sales@dsl-ltd.co.uk](mailto:sales@dsl-ltd.co.uk)



[www.dsl-ltd.co.uk](http://www.dsl-ltd.co.uk)


## Features

- 15.6" TFT LCD Panel PC
- Intel Celeron N2930 Processor
- Modular Concept and Fanless Design
- Support PCT/RTW/AR Glass
- Front Bezel IP66
- Option WiFi/BT/Speaker
- Support 2 x Expansion slot
- DC 9~36V Power input, option AC power input

## Specifications

System		
CPU	Intel Celeron N2930 processor	
System Chipset	SoC	
Memory	2 x 204-pin DDR3L SO-DIMM slot up to 8GB	
IO Port		
Rear side I/O port	4 x USB 3.0 type A 2 x RJ45 GbE LAN 1 x DB9 RS-232/422/485 default RS-232 1 x DB9 RS-232 1 x DB9 RS-422/485 default RS-485 1 x DB15 VGA 1 x HDMI with Cover 1 x Line-out/Mic-in 1 x 2 pin Terminal block for external power switch 2 x LED indication for HDD/System 1 x System LED indication at front 1 x 3 pin TB Power connector 1 x Power Switch on/off	
Option I/O	4 x USB 2.0 Type A via TB-546 2 x DB9 COM port 1 x 8-bit GPIO (3 in/out/VCC/GND)	
Storage Space		
HDD	1 x 2.5" SATA HDD Space (Easy Accessible Storage Design)	
Expansion		
Expansion Slot	1 x Full-size Mini PCIe on board (PCIe/USB/SATA, SATA by default) 1 x Half-size Mini PCIe on board (PCIe/USB, PCIe by default) 1 x SIM slot for option (Option wifi/BT/4G and antenna at rear side) 1 x PCI and 1 x PCIe x1 slot via TB-560P1E11 (default)	
Display		
	<b>Standard</b>	<b>High Brightness Optional</b>
Display Type	15.6" TFT-LCD	15.6" TFT-LCD
Max. Resolution	1366 x 768 1920 x 1080	1366 x 768
Max. Color	16.7M	16.7M
Luminance (cd/m <sup>2</sup> )	300(typ) / 240(Min)	1000
View Angle	160(H) / 160(V)	160(H) / 160(V)
Contrast	500:1	500:1
Backlight Lifetime	50,000 hrs	50,000 hrs
Option	Auto Dimming	Auto Dimming
Touch Screen		
	<b>Resistive Touch</b>	<b>Projected Capacitive Touch</b>
Interface	USB	USB
Light Transmission(%)	Over 80%	Over 90%
Power		
Power Input	DC 9~36V Power input, option AC power input	

## Dimensions

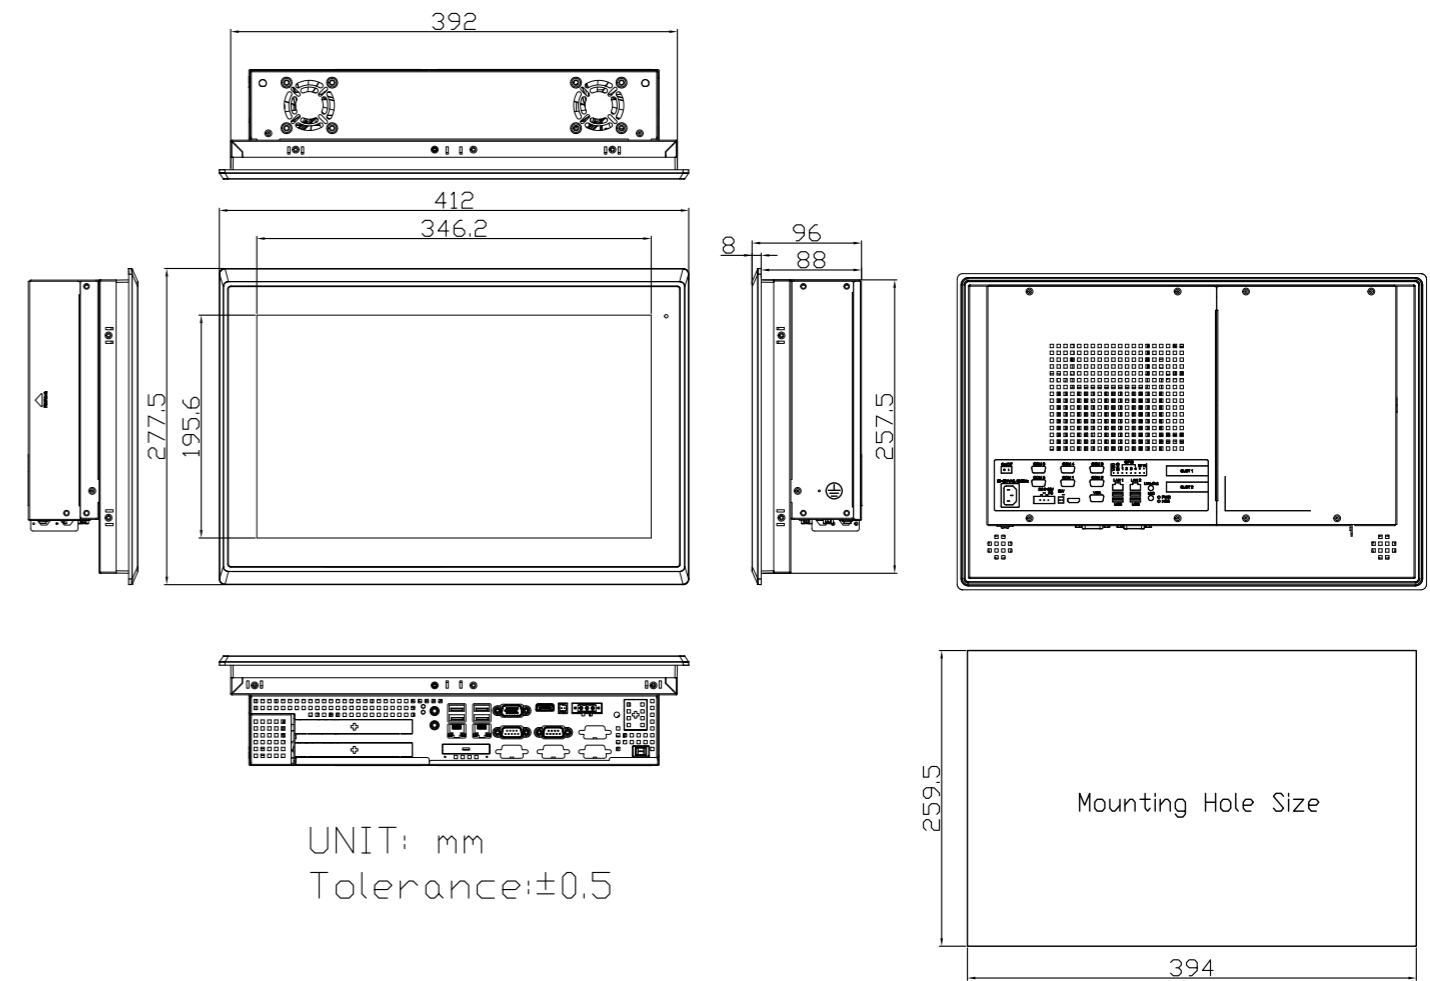

Mechanical	
Construction	Aluminum die-casting front bezel
Mounting	Panel Mount
IP Rating	Front Panel IP66
Dimensions	412 x 277.5 x 96 mm
Net Weight	6.5 kg
Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE / FCC Class A
Operating System Support	
Windows embedded 7	
Windows embedded 8.1	
Windows 10 IoT	
Ordering Information	
VIPAC-816R	15.6" WXGA Intel Celeron N2930 (1.83.GHz ) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, resistive touch window, 9~36VDC power input with adaptor, Alu.die-casting front bezel.
VIPAC-816P	15.6" WXGA Intel Celeron N2930 (1.83.GHz ) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, projected capacitive touch, 9~36VDC power input with adaptor, Alu.die-casting front bezel.