



# DATASOUND - LABORATORIES -


.....  
EMBEDDING THE FUTURE



**Electronic  
Design**



**Panel  
PC / HMI**



**Single Board  
Computer**



**Industrial  
PC**

## Why choose DSL?

- Over 25 Years Industry Experience
- 5 Years Warranty on all Products
- Evaluation Products Available
- Lifetime Technical Support

## Our Services

- Electronic Design
- Production Management
- Assembly and Test
- Bespoke BIOS Creation
- Industrial Embedded PC Solutions



Call us on +44(0)1462 675530



Email us at [sales@dsl-ltd.co.uk](mailto:sales@dsl-ltd.co.uk)



[www.dsl-ltd.co.uk](http://www.dsl-ltd.co.uk)

## Features

- 17" TFT LCD Panel PC
- Intel 6th/7th Core i3/i5/i7 Socket type Processor
- Modular concept and with Fan Design
- Support PCT/RTW/AR Glass
- Front Bezel IP66
- Option WiFi/BT/Speaker
- Support 2 x Expansion slot
- DC 9~36V Power input, option AC power input

## Specifications

System	
CPU	Intel 6th/7th Gen Core i3/i5/i7 processor
System Chipset	Intel H170
Memory	2 x 260-pin SO-DIMM up to 32GB DDR4 2133 MHz SDRAM
IO Port	
Rear side I/O port	4 x USB3.0 type A 2 x RJ45 GbE LAN 1 x DB9 RS-232/422/485 default RS-232 1 x DB9 RS-232 1 x DB9 RS-422/485 default RS-485 1 x DB15 VGA 1 x HDMI with Cover 1 x Line-out/Mic-in 1 x 2pin Terminal block for external power switch 2 x LED indication for HDD/System 1 x System LED indication at front 1 x 3pin TB Power connector 1 x Power Switch on/off
Option I/O	4 x USB 2.0 Type A via TB-546 2 x DB9 COM port 1 x 8-bit GPIO (3 in/out/VCC/GND)

Storage Space	
HDD	2 x 2.5" SATA HDD space, support RAID 0, 1, 5 (Easily Accessible storage design)


Expansion	
Expansion Slot	1 x Full-size Mini PCIe on board(PCle/USB/SATA,SATA by default) 1 x Half-size Mini PCIe on board (PCle/USB, PCle by default) 1 x SIM slot for option(Option wifi/BT/4G and antenna at rear side) 1 x PCle x1 and 1 x PCle x16 slot via TB-560E11E161 (default)

Display	Standard	High Brightness Optional
Display Type	17" TFT-LCD	17" TFT-LCD
Max. Resolution	1280 x1024	1280 x1024
Max. Color	16.7M	16.7M
Luminance (cd/m <sup>2</sup> )	350	1000
View Angle	170(H) / 170(V)	170(H) / 160(V)
Contrast	1000:1	1000:1
Backlight Lifetime	50,000 hrs	50,000 hrs
Option	Auto Dimming	Auto Dimming

Touch Screen	Resistive Touch	Projected Capacitive Touch
Interface	USB	USB
Light Transmission(%)	Over 80%	Over 90%

Power	
Power Input	DC 9~36V Power input, option AC power input

## Dimensions

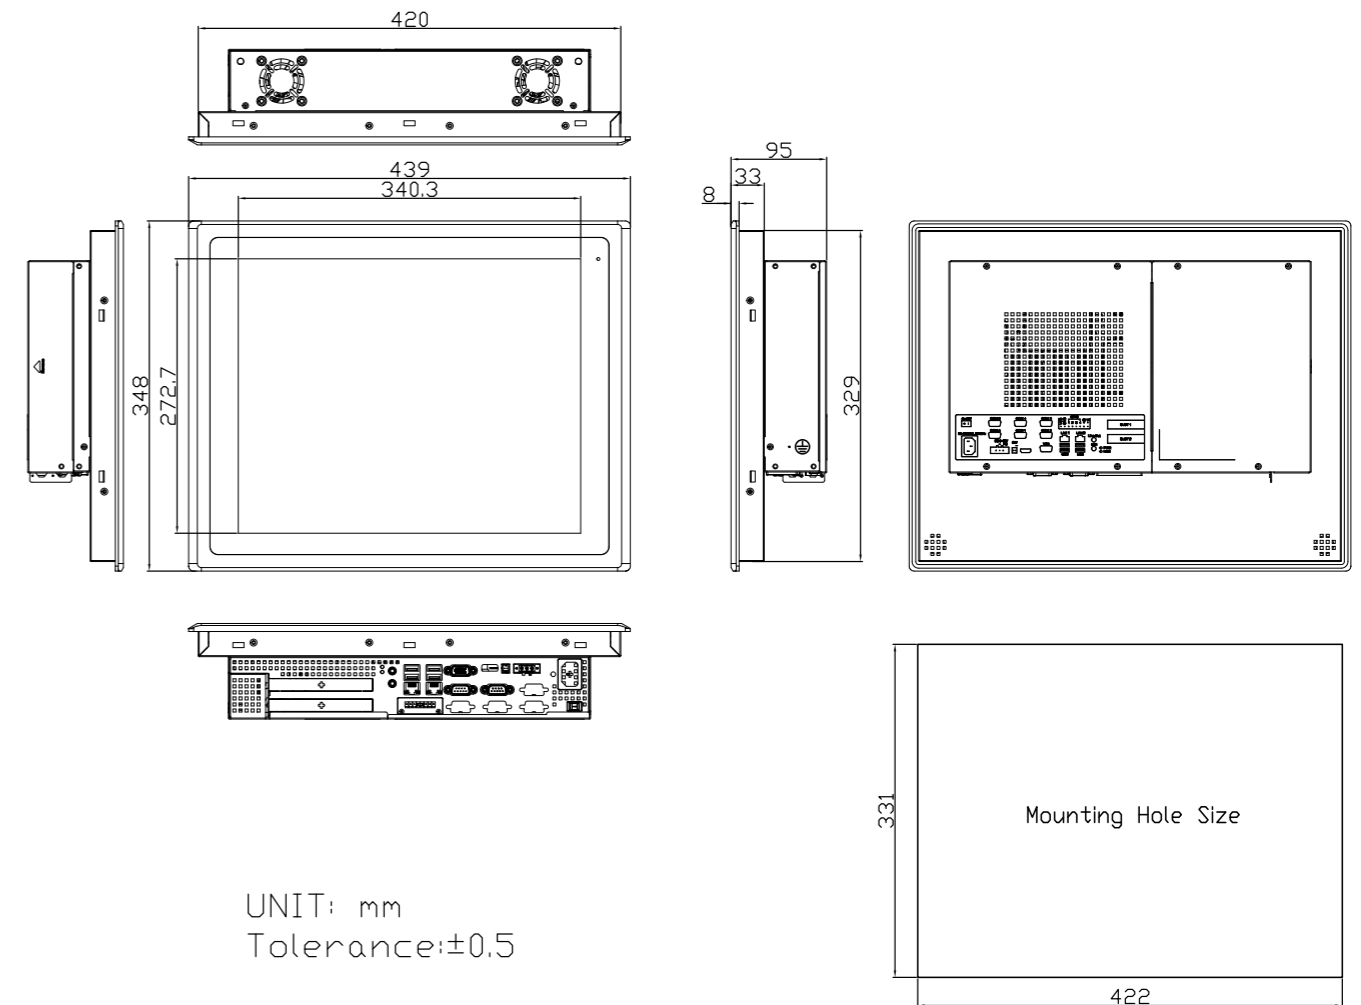

Mechanical	
Construction	Aluminum die-casting front bezel
Mounting	Panel Mount
IP Rating	Front Panel IP66
Dimensions	439 x 348 x 95 mm
Net Weight	7 kg

Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE / FCC Class A

Operating System Support	
Windows embedded 7	
Windows embedded 8.1	
Windows 10 IoT	

Ordering Information	
VIPAC-917R	17" SXGA Intel Core 6th Core i processor with H170 chipset, with Fan design panel PC, 2 x 260pin DDR4 SO-DIMM slot, 2 x 2.5" HDD/SSD space, 1 x PClex1 and 1 x PCle x16 slot, resistive touch window, 9~36VDC power input with adaptor, Alu.die-casting front bezel.
VIPAC-917P	17" SXGA Intel Core 6th Core i processor with H170 chipset, with Fan design panel PC, 2 x 260pin DDR4 SO-DIMM slot, 2 x 2.5" HDD/SSD space, 1 x PClex1 and 1 x PCle x16 slot, projected capacitive touch, 9~36VDC power input with adaptor, Alu.die-casting front bezel.